



#### REPLENISHMENT RATES Per 18 x 24 cm Film

Low Volume	30 to 60 Films/Day	35 - 45ml per Film
Medium Volume	60 to 150 Films/Day	25 - 35ml per Film
High Volume	150 + Films/Day	20 - 30ml per Film

**STARTER:** For Processor Start-Up, Use 1.6 oz. Of T2 Developer Starter Per Gallon Of Working Strength Developer

#### RECOMMENDED PROCESSING

Developer Immersion Time	Developer Temperature
Standard Processing 20 - 35 Seconds	95°F (35°C)
Standard Processing 35 - 50 Seconds	93° - 95°F (34° - 35°C)



## QUALITY MAMMOGRAPHY REQUIRES DEDICATION

For more information,  
contact your local dealer or

**WHITE MOUNTAIN IMAGING**  
P.O. Box 216 • Salisbury, NH 03268  
603-648-2124 • FAX 603-648-2197

**WHITE MOUNTAIN IMAGING**



# T<sub>2</sub>-UM

T<sub>2</sub>-UM is a film specific developer which has been formulated to provide optimum results with Fuji UMA and UMH Mammography Films.



A high activity developer, T<sub>2</sub>-UM Developer is designed to minimize patient exposure without sacrificing detail.

T<sub>2</sub>-UM Developer performs equally well in both standard and extended processing applications.

State of the Art formulation assures the cleanliness and sensitometric stability which is the hallmark of the T<sub>2</sub> family of developers.

Because T<sub>2</sub>-UM eliminates the use of acetic acid and uncomplexed glutaraldehyde, it helps create a healthier, more pleasant working environment.

This product has been designed specifically for use with Fuji UM-MA & UM-MH Mammography Films

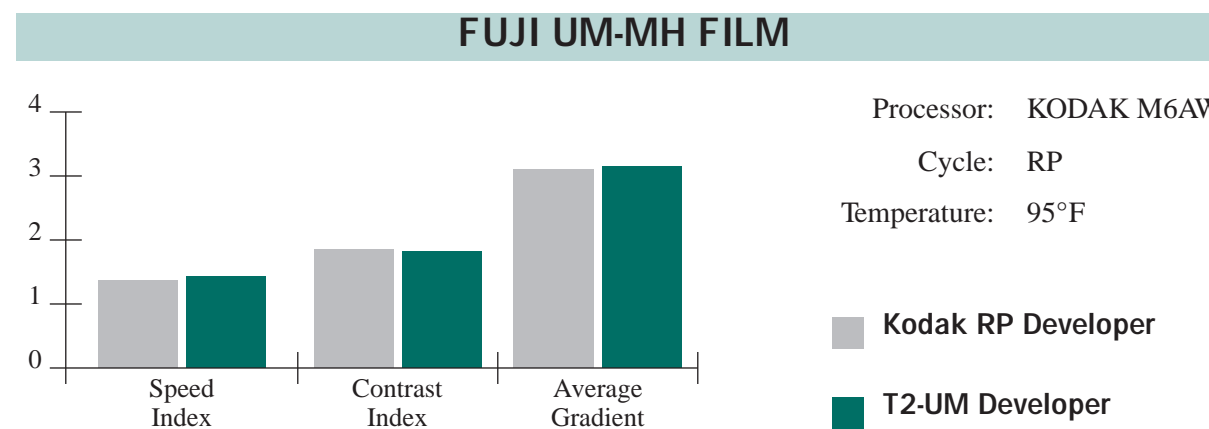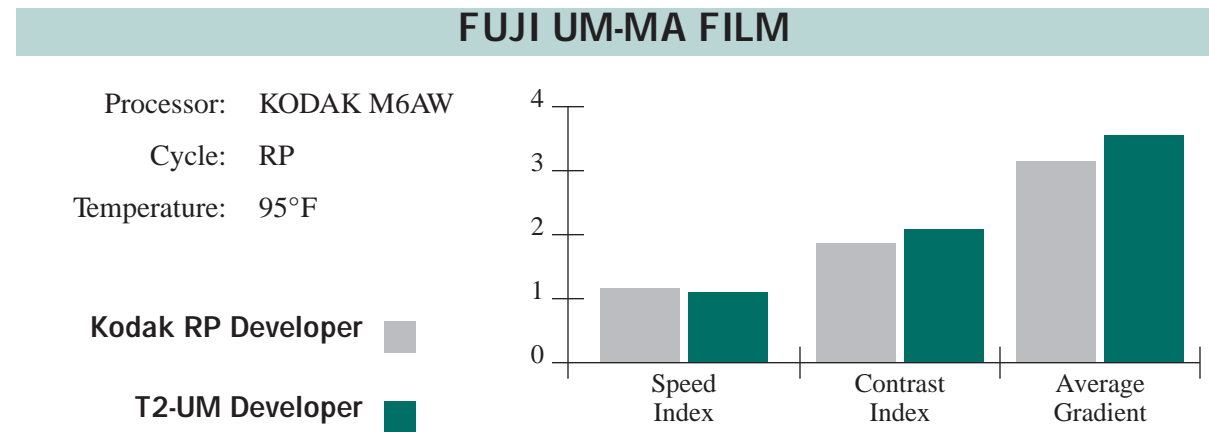

## SPECIFICATIONS

T <sub>2</sub> -UM PART 1	
pH:	10.65 ± .05 @ 70° F
Specific Gravity:	1.280 ± .005 @ 60° F
Color:	Clear
Odor:	Odorless
Dot Hazard Class:	Not Applicable
Dot Labeling Requirements:	None Required
Corrosivity:	Non-corrosive

T <sub>2</sub> -UM PART 2	
pH:	2.60 ± .10 @ 70° F
Specific Gravity:	1.140 ± .005 @ 60° F
Color:	Clear
Odor:	Negligible, Musty Odor
Dot Hazard Class:	Not Applicable
Dot Labeling Requirements:	None Required
Corrosivity:	Non-corrosive

T <sub>2</sub> -UM WORKING STRENGTH	
pH:	10.50 ± .05 @ 70° F
Specific Gravity:	1.080 ± .005 @ 60° F
Color:	Pale Yellow
Odor:	Odorless
Dot Hazard Class:	Not Applicable
Dot Labeling Requirements:	None Required
Corrosivity:	Non-corrosive